CLOVER
ASSET SOLUTIONS

Dry 50

Three-module mine dry. 50 men.



50	10	50	18'	–40°	4
basket hoists	private showers	clean lockers	clear in the dirty bay	rated, warm floor	pieces, step deck

Dirty in, clean out

Three 12 × 56 steel-frame modules attached side by side. Strip and hoist coveralls in an 18' double-height bay, shower in the middle, dress on the clean side. Two entry lanes so 50 men clear the building without a queue. Reversed at shift start.


Warm, dry, quiet

In-floor heat in an insulated wood floor system, finished in heat-welded sheet vinyl with a coved base. Coveralls hoisted into the warmest air in the building and dry by morning. Private full-height shower stalls. Acoustic liner on the tall walls. Daylight from a clerestory. No fluorescent tubes.

Factory built, Clover delivered

Built and tested by HIB in Nisku, Alberta on the same frame and envelope Honomobo has shipped since 2015. Four pieces on standard step decks. Clover handles logistics, crane, set, commissioning and service. Purchase, lease or rental.

Floor plan

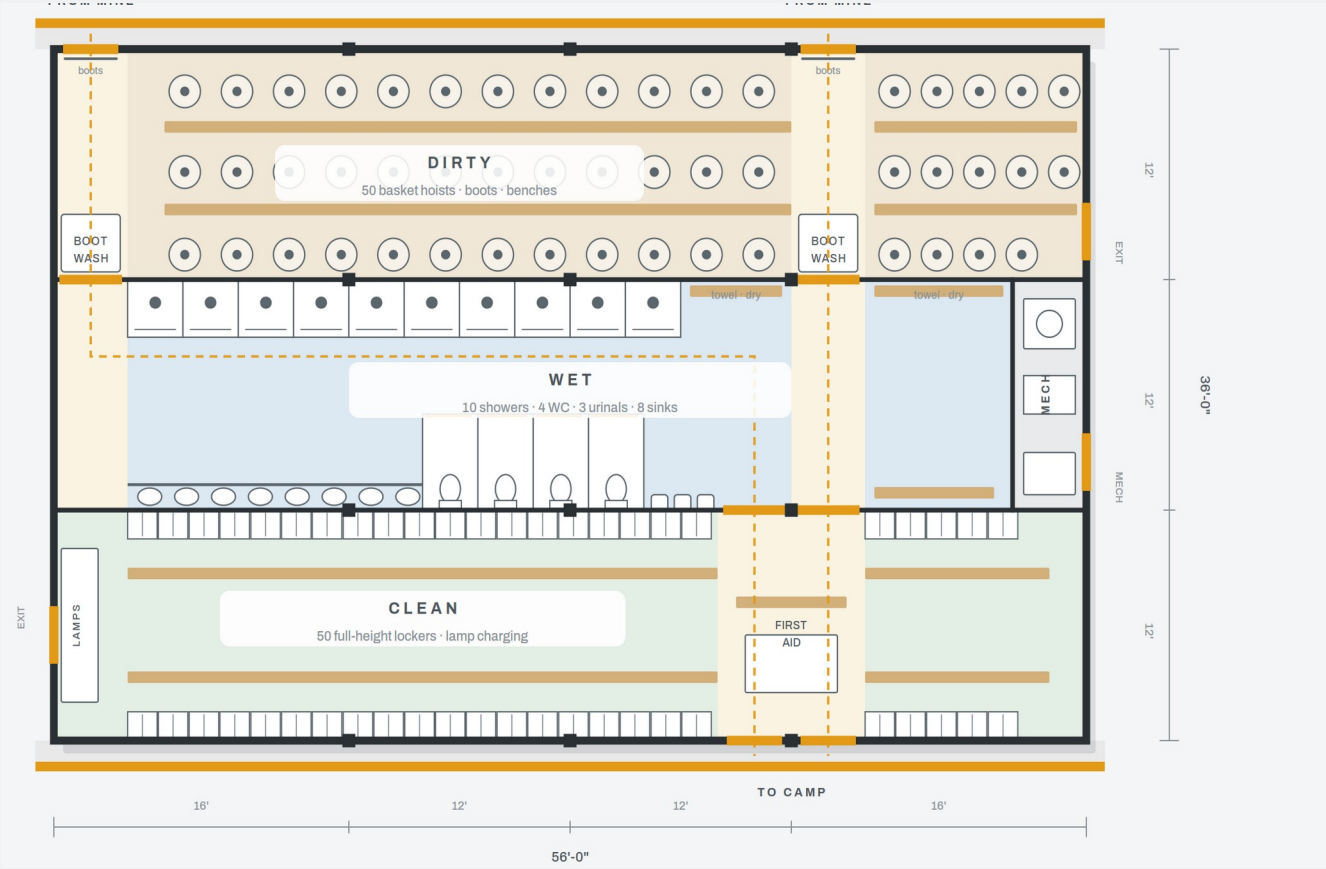

Mine side at the top, camp side at the bottom. Two 4' cross-lanes at 0–4' and 40–44' carry every door; the walls between modules carry the plumbing. Column lines at 16', 28' and 40'. Mechanical at 52–56' on the connection wall. A men's and women's version uses the same shell with one partition.

Specification

Building	36' × 56', three 12 × 56 modules; dirty module a stacked pair, 18' clear
Dirty side	50 basket hoists in three rows, benches, boot wash and heated boot rack in each lane, clerestory
Wet room	10 private showers, 4 WC, 3 urinals, 8 sinks, towel and drying zones. Sloped, membraned, negative pressure
Clean side	50 full-height lockers, benches, 5' aisle, first aid, lamp and gas-monitor charging
Frame	Welded steel moment frame, bays 16–12–12–16, thermally broken, structural stamp
Envelope	R-24 walls, R-30 roof, insulated floor, airtight, −40 °C. Flat fascia, corrugated siding
Floor	Wood floor system on the steel frame, insulated and thermally broken, in-floor heat; heat-welded sheet vinyl with 6" coved base throughout, membrane and drains in wet zones
Services	Boiler, HRV, water heater in one mech room; direct connect or heat-traced tanks
Shipping	4 pieces, 11'6" high, standard step deck; craned to piers, mated, connected at one wall

1 **Spec and quote with Clover**
Size, ratio, options, site. Fixed price and delivery date.

2 **Site pack**
Pier plan, utility stubs, crane guide. Your engineer signs off.

3 **HIB builds**
[16] weeks from order in Nisku. Weekly photos.

4 **Clover delivers and sets**
Logistics, crane, mating, commissioning, service.

[Price] per Dry 50, fixed, quoted by Clover · purchase, lease or rental · structure and envelope warranty 10 years · [Clover contact] · [phone] · [email]